


## Aluminum coated passive fluorine doped fibers

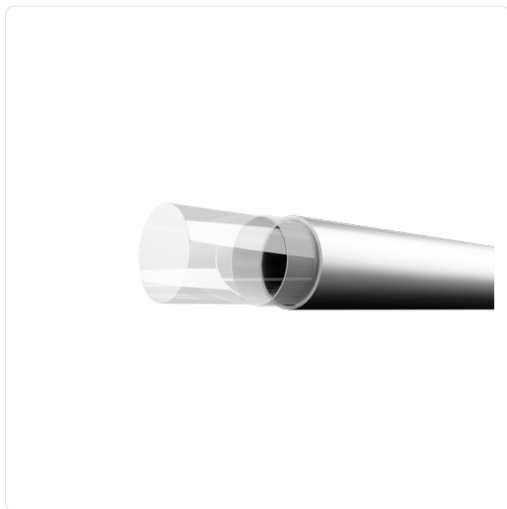

### Specifications

Operating wavelength, nm	400-2200
Output fiber core diameter, $\mu\text{m}$	400-990
Cladding diameter, $\mu\text{m}$	440-880
Numerical aperture of the core	0.2-0.22
Outer diameter, $\mu\text{m}$	560-940
Concentricity error of core and cladding, $\mu\text{m}$	$\leq 2.0$
Coating material	Aluminum
Rewind strength, GPa	0.7